


Style TB5

Bead weld thermocouple w/ Fluoropolymer coating

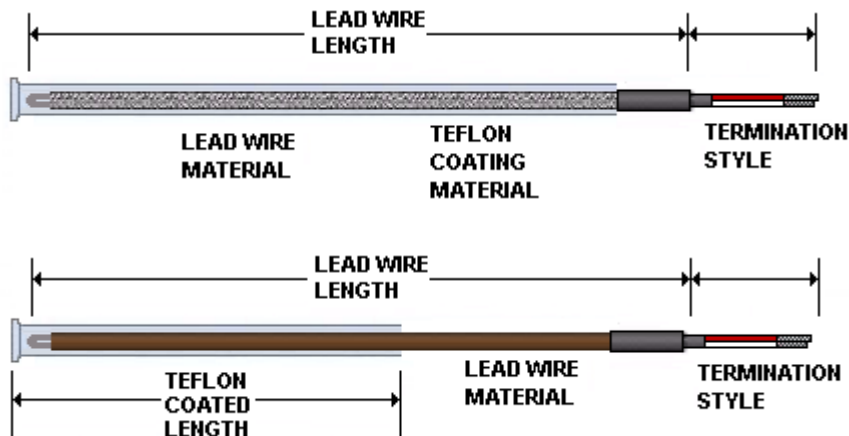

Ordering Information

Part Number

① TB5	② Calibration	③ Lead wire Material	④ Lead wire length (In.)	⑤ Fluoropolymer coating options	⑥ Fluoropolymer coated length (In.)	⑦ Termination Style
TB5						

Optional

⑧ Special Features

② Calibration
J Type J (standard)
K Type K
T Type T
E Type E

③ Lead wire material (Under coating)
A Fiberglass (800°F)
B Fluoropolymer (400°F)
C Polyimide (500°F)
F Fiberglass with stainless steel braid (800°F)
G Fluoropolymer with stainless steel braid (400°F)
Y Fluoropolymer with stainless steel braid w/ Fluoropolymer outer jacket (400°F)

④ Lead wire length (In.)
006"-600" Specify in Inches
Note Over 600" contact factory

⑤ Fluoropolymer coating options
L .032" wall thickness (Thick wall)
S .010 wall thickness (Thin wall)

⑥ Fluoropolymer coated length (In.)
006"-600" Specify in Inches
Note Over 120" contact factory

⑦ Termination style
A 2" stripped leads (bare ends)
B 2" stripped leads w/ spade lugs
C Standard male plug (400°F)
D High temp male Plug (660°F)
E Max temp male Plug (800°F)
F Ceramic male plug (1200°F)
G Solid pin plug (400°F)
H Standard female jack (400°F)
J Miniature plug (400°F)
K Miniature jack (400°F)
L 2" stripped leads w/#6 Ring terminals
N Standard 3 pin plug w/ ground wire (400°F)
W 2" stripped leads w/ pin terminals
Q 2" stripped leads w/ wire ferrules
X Extra long lead wire length (beyond 2" stripped leads) (specify extra long lead wire length below)
006"-240" 006"-240" Specify in Inches

⑧ Special features (Optional)
Note Leave blank for no special features
01 Solid conductor (Lead wire)
07 Cable clamp
08 Bx Connector
09 Mating connector
18 Moisture protection boot on connector

SOUTHWEST HEATER AND CONTROLS

Main# 214-340-7500

Toll Free#: 800-687-2220

EMAIL: sales@swhc.com

WEB: www.swhc.com