


# Style TC4

## Ring terminal or grommet Thermocouple - Matrix OEM style

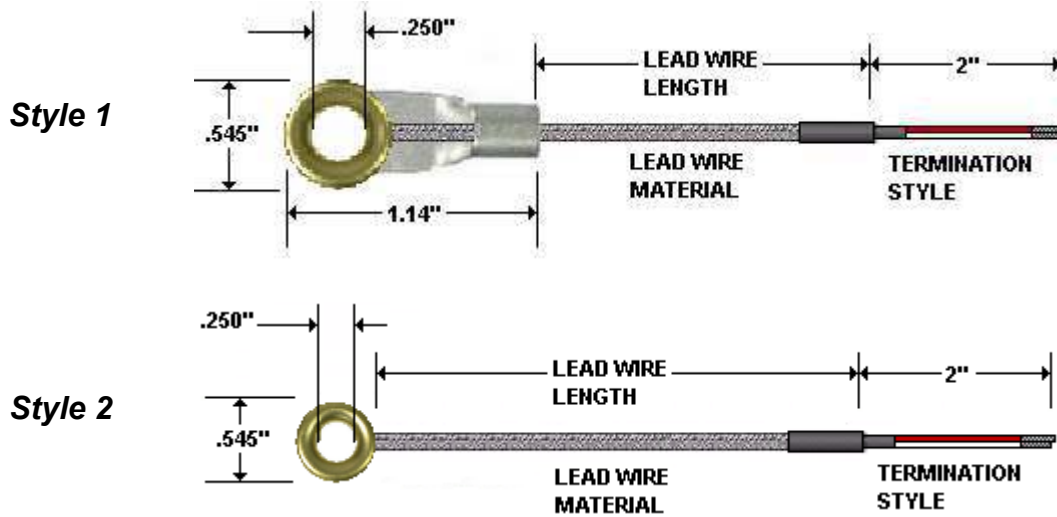

### Ordering Information

① TC4	② Calibration	③ Grommet Style	④ Junction	⑤ Lead wire material	⑥ Lead wire Length (In.)	⑦ Termination Style	⑧ Special Features
TC4			G				

② Calibration
J Type J
K Type K
T Type T
E Type E

③ Grommet Style
1 <b>Style 1</b> 1/4" ID x .545" OD x 1.14" long
2 <b>Style 2</b> 1/4" ID x .545" OD (No ring terminal)
<b>Note</b> For other sizes consult factory

④ Junction
G Grounded (standard)

⑤ Lead wire material
A Fiberglass (800°F)
B Fluoropolymer (400°F)
C Polyimide (500°F)
F Fiberglass with stainless steel braid (800°F)
G Fluoropolymer with stainless steel braid (400°F)
<b>Note</b> Wire gauge based on sheath diameter

⑥ Lead wire length (In.)
006-600" Specify in Inches
Over 600" contact factory

⑦ Termination style
A 2" stripped leads (bare ends)
B 2" stripped leads w/ spade lugs
C Standard male plug (400°F)
D High temp male Plug (660°F)
E Max temp male Plug (800°F)
G Solid pin plug (400°F)
H Standard female jack (400°F)
J Miniature plug (400°F)
K Miniature jack (400°F)
L 2" stripped leads w/#6 Ring terminals
W 2" stripped leads w/ pin terminals
Q 2" stripped leads w/ wire ferrules
X Extra long lead wire length (beyond 2" stripped leads) (specify extra long lead wire length below)
006"-240" 006"-240" Specify in Inches

⑧ Special features (Optional)
<b>Note</b> Leave blank for no special features
07 Cable clamp
08 Bx Connector
09 Mating connector
11 International IEC 584-3 color coded leads
12 British color coded leads
13 German color coded leads
14 Japanese color coded leads
15 Reverse polarity color coded leads
16 French color coded leads
18 Moisture protection boot on connector

- 20 awg stranded wire comes standard
- Junction is made inside brass grommet.

**SOUTHWEST HEATER AND CONTROLS**

Main# 214-340-7500

Toll Free#: 800-687-2220

EMAIL: sales@swhc.com

WEB: www.swhc.com