


Style TG2 Hose Clamp Thermocouple

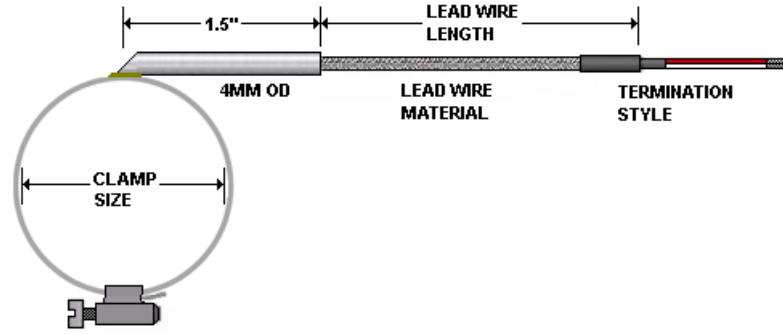

Ordering Information Part Number

① TG2	② Calibration	③ Clamp Size (inches)	④ Lead Wire Material	⑤ Lead Wire Length (inches)	⑥ Junction	⑦ Termination Style	⑧ Special Features
TG2							

Optional

②	Calibration
J	Type J (standard)
K	Type K
T	Type T
E	Type E

③	Clamp size (Inches)
Z00	7/32" to 5/8" (5/16" band width)
Z01	7/16" to 25/32" (5/16" band width)
Z02	1/2" to 29/32" (5/16" band width)
Z03	11/16" to 1-1/4" (5/16" band width)
Z04	15/16" to 1-1/2" (5/16" band width)
Z05	1-7/16" to 2" (5/16" band width)
Z06	1-11/16" to 2-1/4" (5/16" band width)
Z07	1-15/16" to 2-1/2" (5/16" band width)
Z08	9/16" to 1-1/16" (1/2" band width)
Z09	11/16" to 1-1/4" (1/2" band width)
Z10	13/16" to 1-3/4" (1/2" band width)
Z11	1-1/16" to 2" (1/2" band width)
Z12	1-9/16" to 2-1/2" (1/2" band width)
Z13	2-1/16" to 3" (1/2" band width)
Z14	2-5/16" to 3-1/4" (1/2" band width)
Z15	2-13/16" to 3-3/4" (1/2" band width)
Z16	3-1/16" to 4" (1/2" band width)
Z17	3-9/16" to 4-1/2" (1/2" band width)
Z18	1-7/8" to 5" (1/2" band width)
Z19	2-1/2" to 5-1/2" (1/2" band width)
Z20	3-1/8" to 6" (1/2" band width)
Z21	3-5/8" to 6-1/2" (1/2" band width)
Z22	4-1/8" to 7" (1/2" band width)
Z23	5-5/8" to 8-1/2" (9/16" band width)
Z24	7-1/8" to 10" (9/16" band width)
Z25	9-3/8" to 12-1/4" (9/16" band width)
Note	Check with factory for custom sizes

④	Lead wire material
A	Fiberglass (800°F)
B	Fluoropolymer (400°F)
C	Polyimide (500°F)
E	High temperature fiberglass (1200°F)
F	Fiberglass with stainless steel braid (800°F)
G	Fluoropolymer with stainless steel braid (400°F)
H	Fiberglass with armor cable (800°F)
J	Fluoropolymer with armor cable (400°F)
K	Polyimide with armor cable (500°F)
L	High temperature fiberglass with armor cable (1200°F)
M	Fiberglass with stainless steel braid with armor cable (800°F)
W	Fluoropolymer with stainless steel braid with armor cable (400°F)
Note	Wire gauge based on sheath diameter

⑤	Lead wire length
006"-600"	Specify in Inches
Note	Over 600" contact factory

⑥	Junction
G	Grounded (standard)
U	Ungrounded
W	Grounded (Dual Junction)
Z	Ungrounded (Dual Junction)

⑦	Termination style
A	2" stripped leads (bare ends)
B	2" stripped leads w/ spade lugs
C	Standard male plug (400°F)
D	High temp male Plug (660°F)
E	Max temp male Plug (800°F)
G	Solid pin plug (400°F)
H	Standard female jack (400°F)
J	Miniature plug (400°F)
K	Miniature jack (400°F)
L	2" stripped leads w/#6 Ring terminals
M	2 Standard male plugs (dual junctions) (400°F)
N	Standard 3 pin plug w/ ground wire (400°F)
P	Dual molded male plug (400°F)
W	2" stripped leads w/ pin terminals
Q	2" stripped leads w/ wire ferrules
X	Extra long lead wire length (beyond 2" stripped leads) (specify extra long lead wire length below)
006"-240"	006"-240" Specify in Inches

⑧	Special features (Optional)
Note	Leave blank for no special features
01	Solid conductor (Lead wire)
02	1.5" long strain relief spring
03	1.5" long heat shrink where wire exits the probe
06	Epoxy seal (500°F)
07	Cable clamp
08	Bx Connector
09	Mating connector
11	International IEC 584-3 color coded leads
12	British color coded leads
13	German color coded leads
14	Japanese color coded leads
16	French color coded leads
18	Moisture protection boot on connector

SOUTHWEST HEATER AND CONTROLS

Main# 214-340-7500

Toll Free#: 800-687-2220

EMAIL: sales@swhc.com

WEB: www.swhc.com