


# Style RE2

## Polyimide Adhesive stick-on RTD "Peel & Stick"

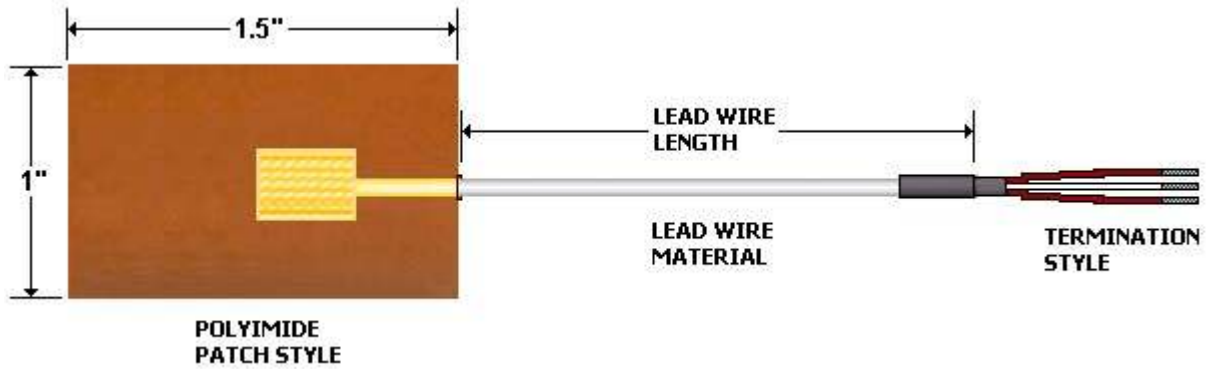

### Ordering Information Part Number

① RE2	② Element Type	③ Element Accuracy	④ Wire Configuration	⑤ Polyimide Patch style	⑥ Lead Wire Material	⑦ Lead wire Length (inches)	⑧ Termination Style	⑨ Special Features
RE2								

②	Element type
T	100 Ω DIN 00385 (thin film)
U	500 Ω DIN 00385 (thin film)
W	1000 Ω DIN 00385 (thin film)

③	Element Accuracy (0 °C)
A	Class A (0.06%)
B	Class B (0.12%)

④	Wire Configuration
2	2-wire
3	3-wire
4	4-wire

⑤	Polyimide Patch style (Length x Width)
H	1.5" x 1"
Note	<i>For other sizes consult factory</i>

⑥	Lead wire material
B	Fluoropolymer (400°F)

⑦	Lead wire length (in.)
006"-600"	Specify in Inches
Note	<i>Over 600" contact factory</i>

⑧	Termination style
A	2" stripped leads (bare ends) (standard)
D	Standard male 3 pin plug (400°F)
G	Standard 3 pin female jack (400°F)
P	Miniature male 3 pin plug (400°F)
K	Miniature female 3 pin jack (400°F)
W	2" stripped leads w/ pin terminals
Q	2" stripped leads w/ wire ferrules

### Optional

⑨	Special features
Note	<i>Leave blank for no special features</i>
07	Cable clamp
09	Mating connector

- **Self adhesive peel off backing**
- **Silicone adhesive leaves no residue behind**

**SOUTHWEST HEATER AND CONTROLS**

Main# 214-340-7500

Toll Free#: 800-687-2220

EMAIL: sales@swhc.com

WEB: www.swhc.com