


# Style RF2 8-32 Bolt Type RTD

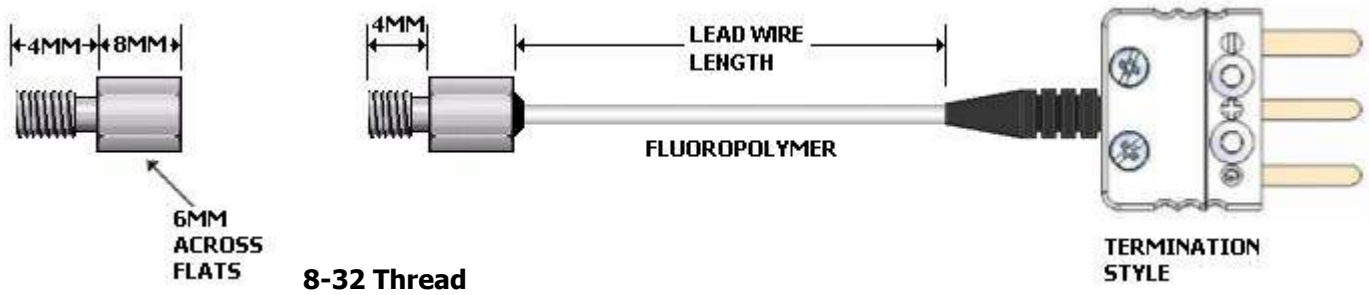

## Ordering Information Part Number

① RF2	② Element Type	③ Element Accuracy	④ Wire Configuration	⑤ Thread Size	⑥ Lead Wire Material	⑦ Lead wire Length (inches)	⑧ Termination Style
RF2							

## Optional

⑨ Special Features

② Element type
T 100 Ω DIN 00385 (thin film)

⑤ Thread size
M 8-32 (8mm long hex)

⑧ Termination style
A 2" stripped leads (bare ends) (standard)
C Standard male 2 pin plug (400°F)
D Standard male 3 pin plug (400°F)
G Standard 3 pin female jack (400°F)
H Miniature male 2 pin plug (400°F)
P Miniature male 3 pin plug (400°F)
J Miniature female 2 pin jack (400°F)
K Miniature female 3 pin jack (400°F)
W 2" stripped leads w/ pin terminals
Q 2" stripped leads w/ wire ferrules

③ Element Accuracy (0 °C)
A Class A (0.06%)
B Class B (0.12%)

⑥ Lead wire material
B Fluoropolymer (400°F)

④ Wire Configuration
2 2-wire
3 3-wire

⑦ Lead wire length (In.)
006"-600" Specify in Inches
Note <i>Over 600" contact factory</i>

⑨ Special features
Note <i>Leave blank for no special features</i>
07 Cable clamp
09 Mating connector
42 Rubber strain relief for mini connector

*Shown above with rubber strain relief special feature "42"*

## SOUTHWEST HEATER AND CONTROLS