


Style TE2

Polyimide Adhesive Thermocouple

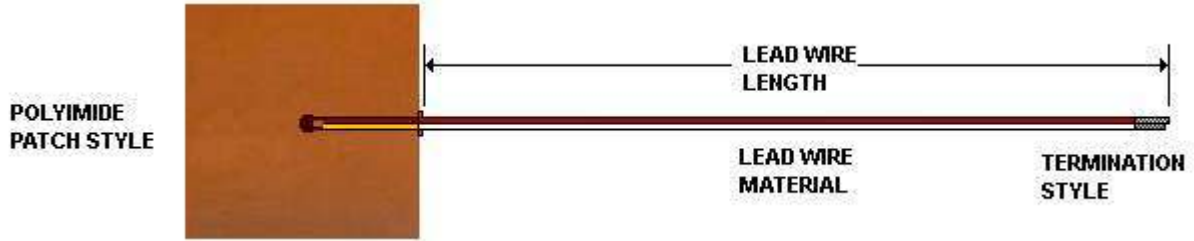

Ordering Information

① TE2	② Calibration	③ Polyimide Patch style	④ Wire gauge/ Style	⑤ Lead wire material	⑥ Lead wire length (Inches)	⑦ Termination Style	⑧ Special Features
TE2							

Optional

② Calibration
J Type J
K Type K
T Type T
E Type E

③ Polyimide Patch style (Length x Width)
F 1" x 1"
H 1.5" x 1"
M 1" Circle
Note For other sizes consult factory

④ Wire gauge
3 30 AWG (Fluoropolymer ONLY)
1 24 AWG

⑤ Lead wire material
B Fluoropolymer (400°F)
C Polyimide (500°F)
i Fluoropolymer Singles

⑥ Lead wire length (In.)
006"-120" Specify in Inches
Note Over 120" contact factory


⑦ Termination style
A 2" stripped leads (bare ends)
B 2" stripped w/ spade lugs
C Standard male plug (400°F)
G Solid pin plug (400°F)
H Standard female jack (400°F)
J Miniature plug (400°F)
K Miniature jack (400°F)

⑧ Special features (Optional)
Note Leave blank for no special features
01 Solid conductor (Lead wire)
07 Cable clamp
09 Mating connector
42 Rubber strain relief for mini plug


Option "F" 1"x1"



Option "H" 1.5x1"

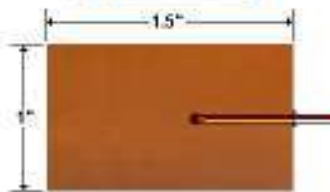

Option "M" 1" circle



- Stranded wire comes standard (use special feature code "01" for solid conductor)
- Silicone adhesive leaves no residue behind

SOUTHWEST HEATER AND CONTROLS

Main# 214-340-7500

Toll Free#: 800-687-2220

EMAIL: sales@swhc.com

WEB: www.swhc.com