


Thermowell with Stepped threaded bar stock Series 101

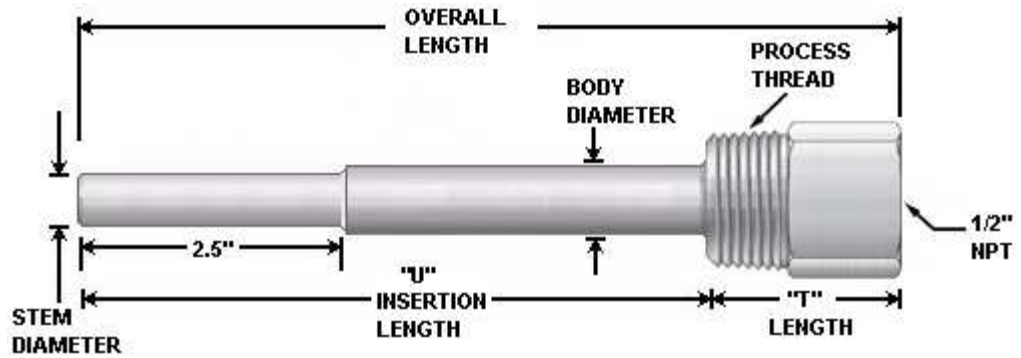

Ordering Information

① 101	② Process Thread / Diameter	③ Bore Size	④ "U" Insertion Length	⑤ "U" Insertion Length (Frac.In)	⑥ "T" Length	⑦ Well Material
101		G				

②	Process Thread / Body diameter/ Stem diameter
X	1/2"NPT (5/8" Body diameter, 1/2" Stem diameter)
Y	3/4"NPT (3/4" Body diameter, 1/2" Stem diameter)
Z	1"NPT (7/8" Body diameter, 1/2" Stem diameter)

③	Bore Size
G	.265"

④	"U" Insertion Length (Whole In.)
002"-048"	Specify in Inches
	<i>Over 960" contact factory</i>

⑤	"U" Insertion Length (fractional in.)
A	0
B	1/8"
C	1/4"
D	3/8"
E	1/2"
F	5/8"
G	3/4"
H	7/8"

⑥	"T" Length
F	1.75"

⑦	Well Material
M	304SS
P	316 SS
Q	310 SS
R	316 L SS
S	410 SS
T	446 SS
K	Inconel 600 (Alloy 600)
W	Hastelloy B
X	Hastelloy C
Y	Carbon Steel
Z	Alloy 800 (Incoloy)

- *Not all bore sizes available in all configurations*
- *Diameter is determined by process thread size*
- *Other well materials available*

SOUTHWEST HEATER AND CONTROLS